

NO.	NOTES	NO.	NOTES														
	FOR ACTUAL WIRING DIAGRAMS OF INDIVIDUAL UNITS, SEE: WDNUMBER UNITS DIRECTLY OPERABLE WITH LESU 7	10	FORM PAPER OUT ALARM MOUNTED ON EITHER TH EXTERNAL TO THE CAB CONNECTIONS ARE MADE C 25 AND C 26														
1	<table border="0"> <tr> <td>2883WD</td> <td>BASE, RECEIVING ONLY - LB4</td> </tr> <tr> <td>3236 WD</td> <td>CABINETS - LAC 203,204,205</td> </tr> <tr> <td>2874 WD</td> <td>ELECTRICAL SERVICE UNIT LESU 7/184</td> </tr> <tr> <td>2882WD</td> <td>KEYBOARDS - LK4, 5</td> </tr> <tr> <td>2900WD</td> <td>MOTOR UNITS - LMU 3, 4, 6</td> </tr> <tr> <td>2864WD</td> <td>PAGE TYPING UNITS - LP4, 5, 7</td> </tr> <tr> <td>2880 WD</td> <td>PAGE TYPING UNITS - LP6, 8</td> </tr> </table>	2883WD	BASE, RECEIVING ONLY - LB4	3236 WD	CABINETS - LAC 203,204,205	2874 WD	ELECTRICAL SERVICE UNIT LESU 7/184	2882WD	KEYBOARDS - LK4, 5	2900WD	MOTOR UNITS - LMU 3, 4, 6	2864WD	PAGE TYPING UNITS - LP4, 5, 7	2880 WD	PAGE TYPING UNITS - LP6, 8	11	WHEN PAPER FEED-OUT SW (----) CONNECTIONS AN (—x—) IN MOTOR POW
2883WD	BASE, RECEIVING ONLY - LB4																
3236 WD	CABINETS - LAC 203,204,205																
2874 WD	ELECTRICAL SERVICE UNIT LESU 7/184																
2882WD	KEYBOARDS - LK4, 5																
2900WD	MOTOR UNITS - LMU 3, 4, 6																
2864WD	PAGE TYPING UNITS - LP4, 5, 7																
2880 WD	PAGE TYPING UNITS - LP6, 8																
	<p>LEGEND</p> <ul style="list-style-type: none"> ○ A SELECTOR MAGNET TERMINAL BLOCK (IN LESU) ○ B LINE TEST KEY TERMINAL BLOCK (IN LESE) ○ C CABINET TERMINAL BLOCK ○ D MOTOR CONTROL TERMINAL BLOCK (IN LESU) ○ E POWER TERMINAL BLOCK (IN LESU) ◀ F KEYBOARD OR REC. ONLY BASE CONNECTOR. ◀ R TYPING UNIT CONNECTOR ○ S MOTOR TERMINAL BLOCK (ON LK OR LB) 	12	ASSOCIATED APPARATUS ACCESSORY COMPONENT														
2		13	CIRCUITS SHOW A SIGNAL IN BOTH KEYBOARD AND WHEN SWITCH NOT USE CONNECTIONS AND OMIT (—x—).														
		14	IF LK3 KEYBOARD LB3 TYPING UNIT IS TO BE STRAP F4 TO F7 AND BE ADDED TO ITS CON COMPLETE LINE SHUNT STRAP MAY ALREADY B														
3	DOT DASH --- LINES INDICATE FILTERING SHIELDING AND SUPPRESSION NETWORKS.																
4	ALL APPARATUS IS SHOWN IN UNOPERATED OR DE - ENERGIZED POSITIONS																
5	<ul style="list-style-type: none"> a RESISTANCE VALUES IN OHMS (Ω) b INDUCTANCE VALUES IN MICROHENRIES (μH) c CAPACITANCE VALUES IN MICROFARADS (μF) 																
6	CIRCUITS SHOW FOR .060 AMP. NEUTRAL SIGNAL LINE OPERATION FOR .020 AMP. LINE CURRENT, ADD DASHED (----) CONNECTIONS AND OMIT CONNECTIONS MARKED (—x—) IN SELECTOR MAGNET CIRCUIT.																
7	<ul style="list-style-type: none"> a USE POWER AND SIGNAL LINE SUPPRESSORS AND SYNC. OR GOV. - FILTER MOTOR FOR INSTALLATIONS REQUIRING MINIMUM R.E. INTERFERENCE. b FOR OTHER INSTALLATIONS, OMIT SUPPRESSORS AND CONNECT INPUTS AND GOV. MOTOR, IF USED, DIRECT TO TERMINALS SHOWN. 																
8	USE SYNCHRONOUS MOTOR ON REGULATED 60 \sim ($\pm 1\%$) A.C. POWER ONLY. GOVERNED MOTOR AND OTHER POWER CIRCUITS OPERABLE ON 50-60 \sim UNREGULATED A.C.																
9	CIRCUIT SHOWS BOTH HORIZONTAL TABULATOR AND FORM START CONTROL USED ON TYPING UNIT. WHEN ONLY ONE CONTROL IS USED, OMIT CONNECTION MARKED (—x—) AND ADD PROPER DASHED (----) CONNECTION IN TYPING UNIT CIRCUITS.																

NOTES


FORM PAPER OUT ALARM CONTACTS MAY BE MOUNTED ON EITHER THE TYPING UNIT OR EXTERNAL TO THE CABINET. IN LATTER EVENT, CONNECTIONS ARE MADE DIRECTLY TO TERMINALS C25 AND C26


WHEN PAPER FEED-OUT SWITCH IS NOT USED, ADD DASHED (---) CONNECTIONS AND OMIT CONNECTIONS MARKED (—X—) IN MOTOR POWER CIRCUITS.

ASSOCIATED APPARATUS MAY CONTAIN INACTIVE ACCESSORY COMPONENTS


CIRCUITS SHOW A SIGNAL LINE BREAK SWITCH IN BOTH KEYBOARD AND RECEIVING ONLY BASE, WHEN SWITCH NOT USED, ADD DASHED (---) CONNECTIONS AND OMIT CONNECTIONS MARKED (—X—).

IF LK3 KEYBOARD LB3 REC. ONLY BASE, OR LP3 TYPING UNIT IS TO BE USED WITH LESU 7/184, STRAP F4 TO F7 AND/OR R14 TO R17 MUST BE ADDED TO ITS CONNECTORS IN ORDER TO COMPLETE LINE SHUNT RELAY CIRCUIT. (EITHER STRAP MAY ALREADY BE IN CIRCUIT)


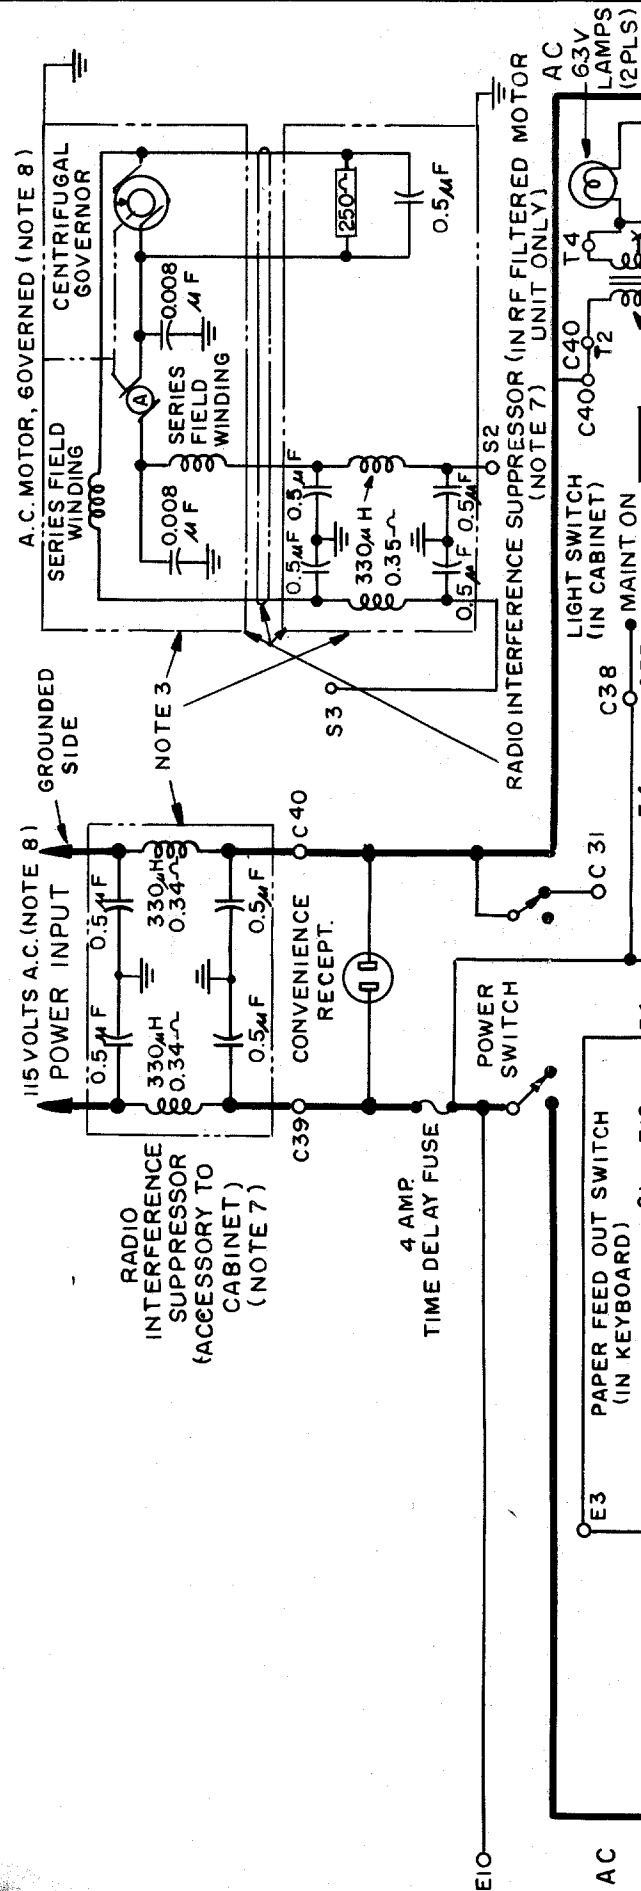


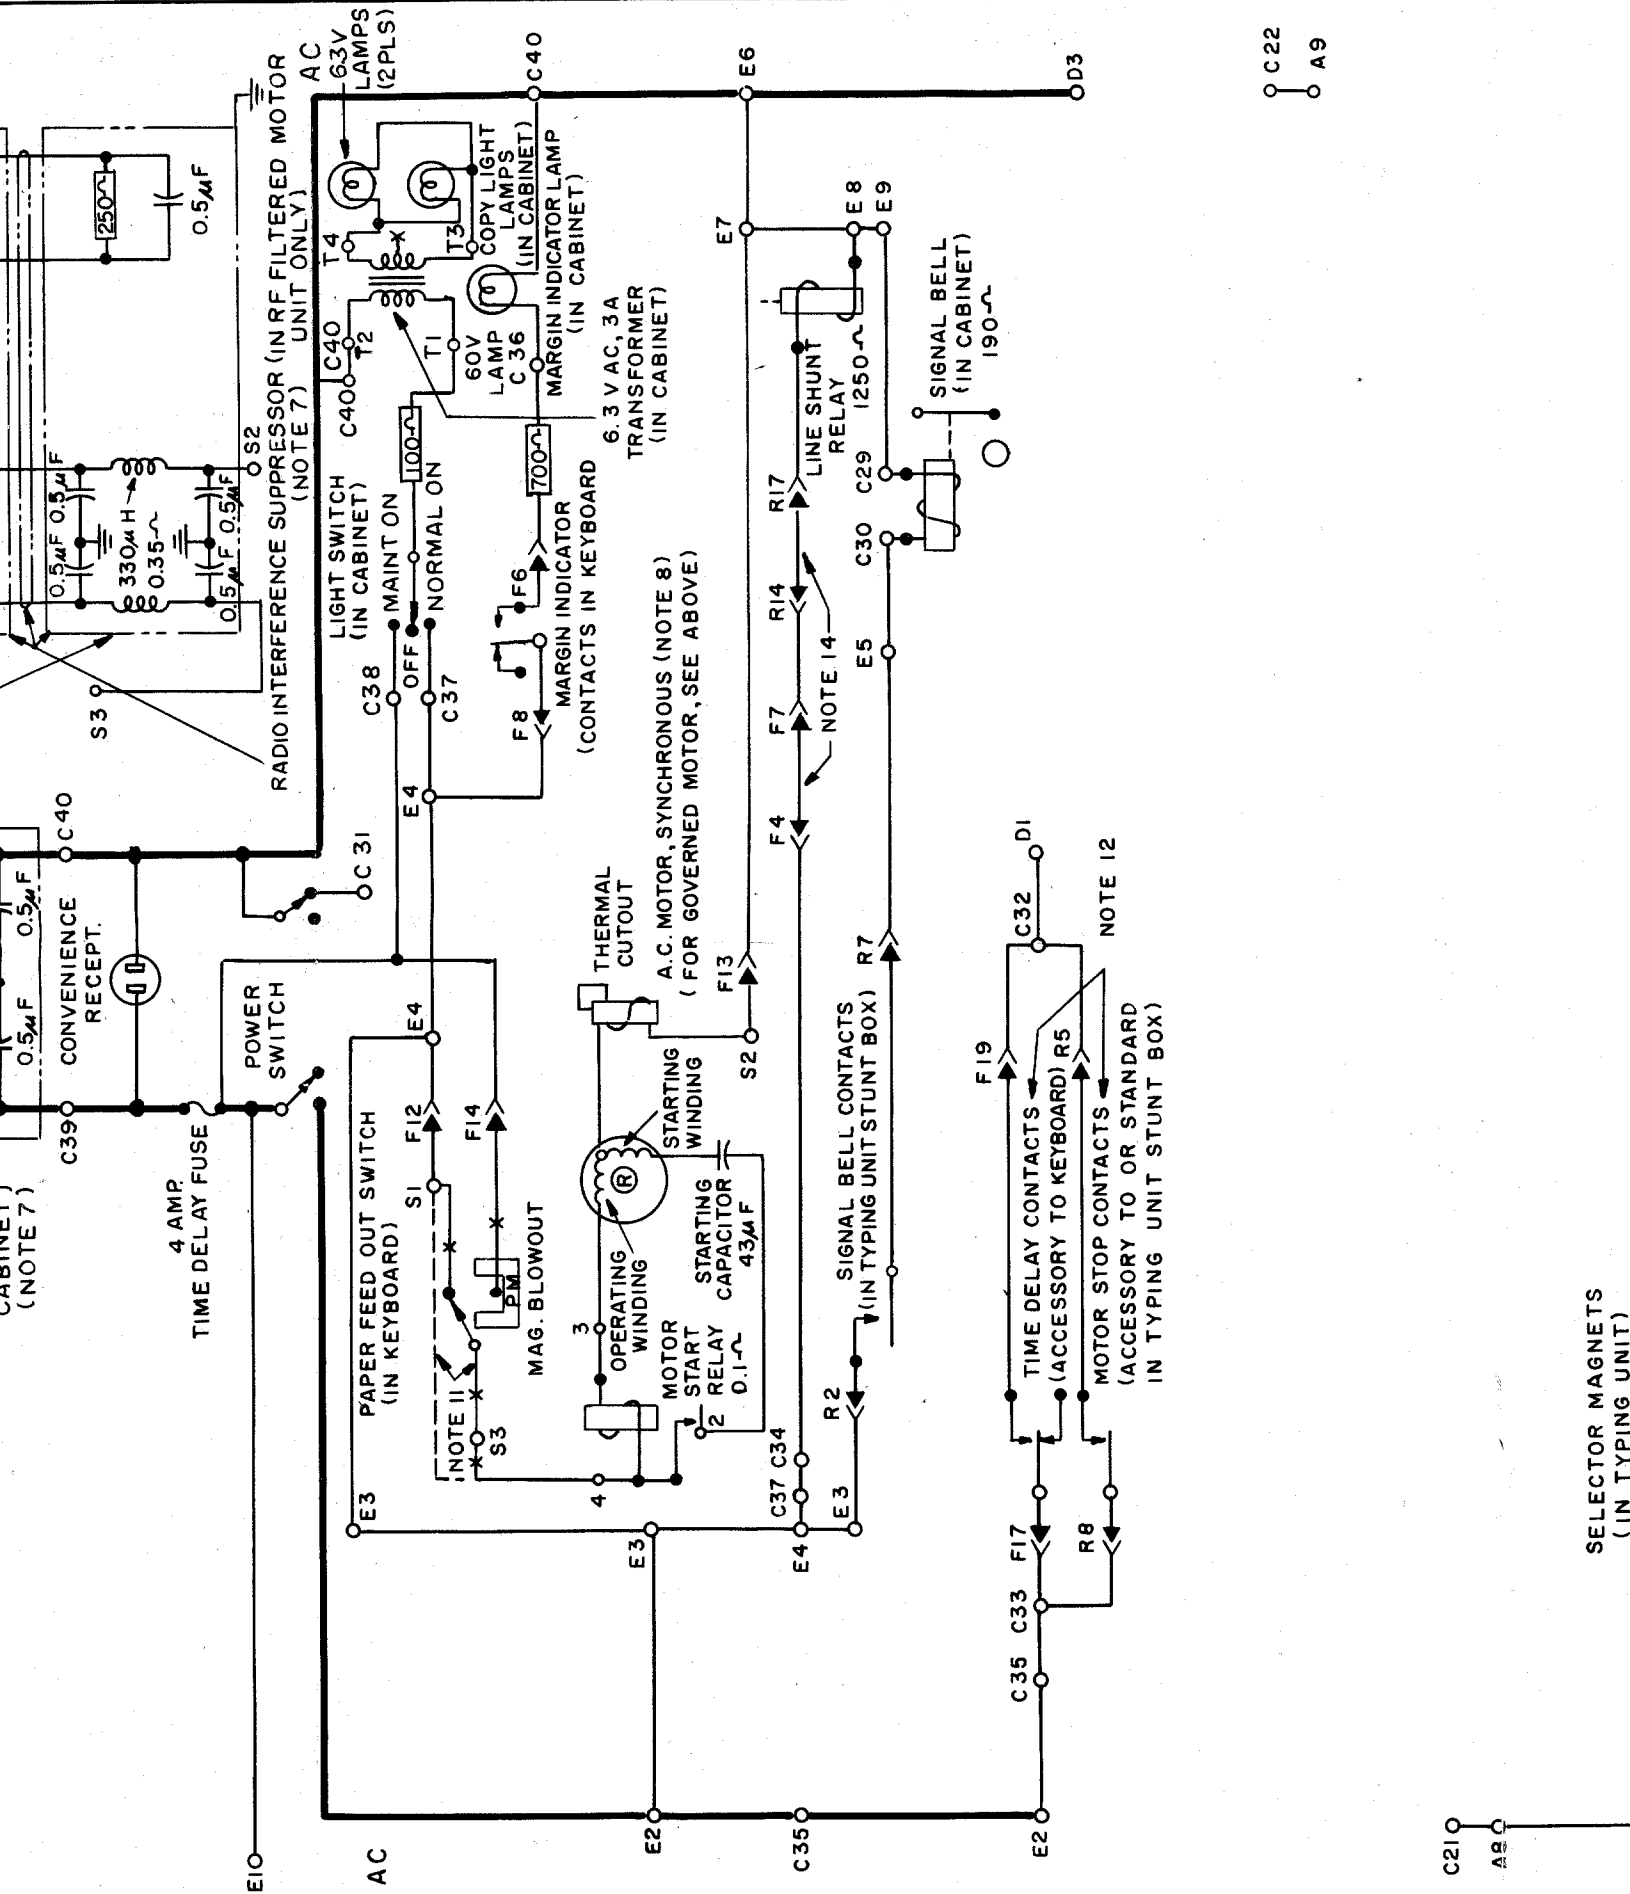



SELECTOR MAGNETS
(IN TYPING UNIT)

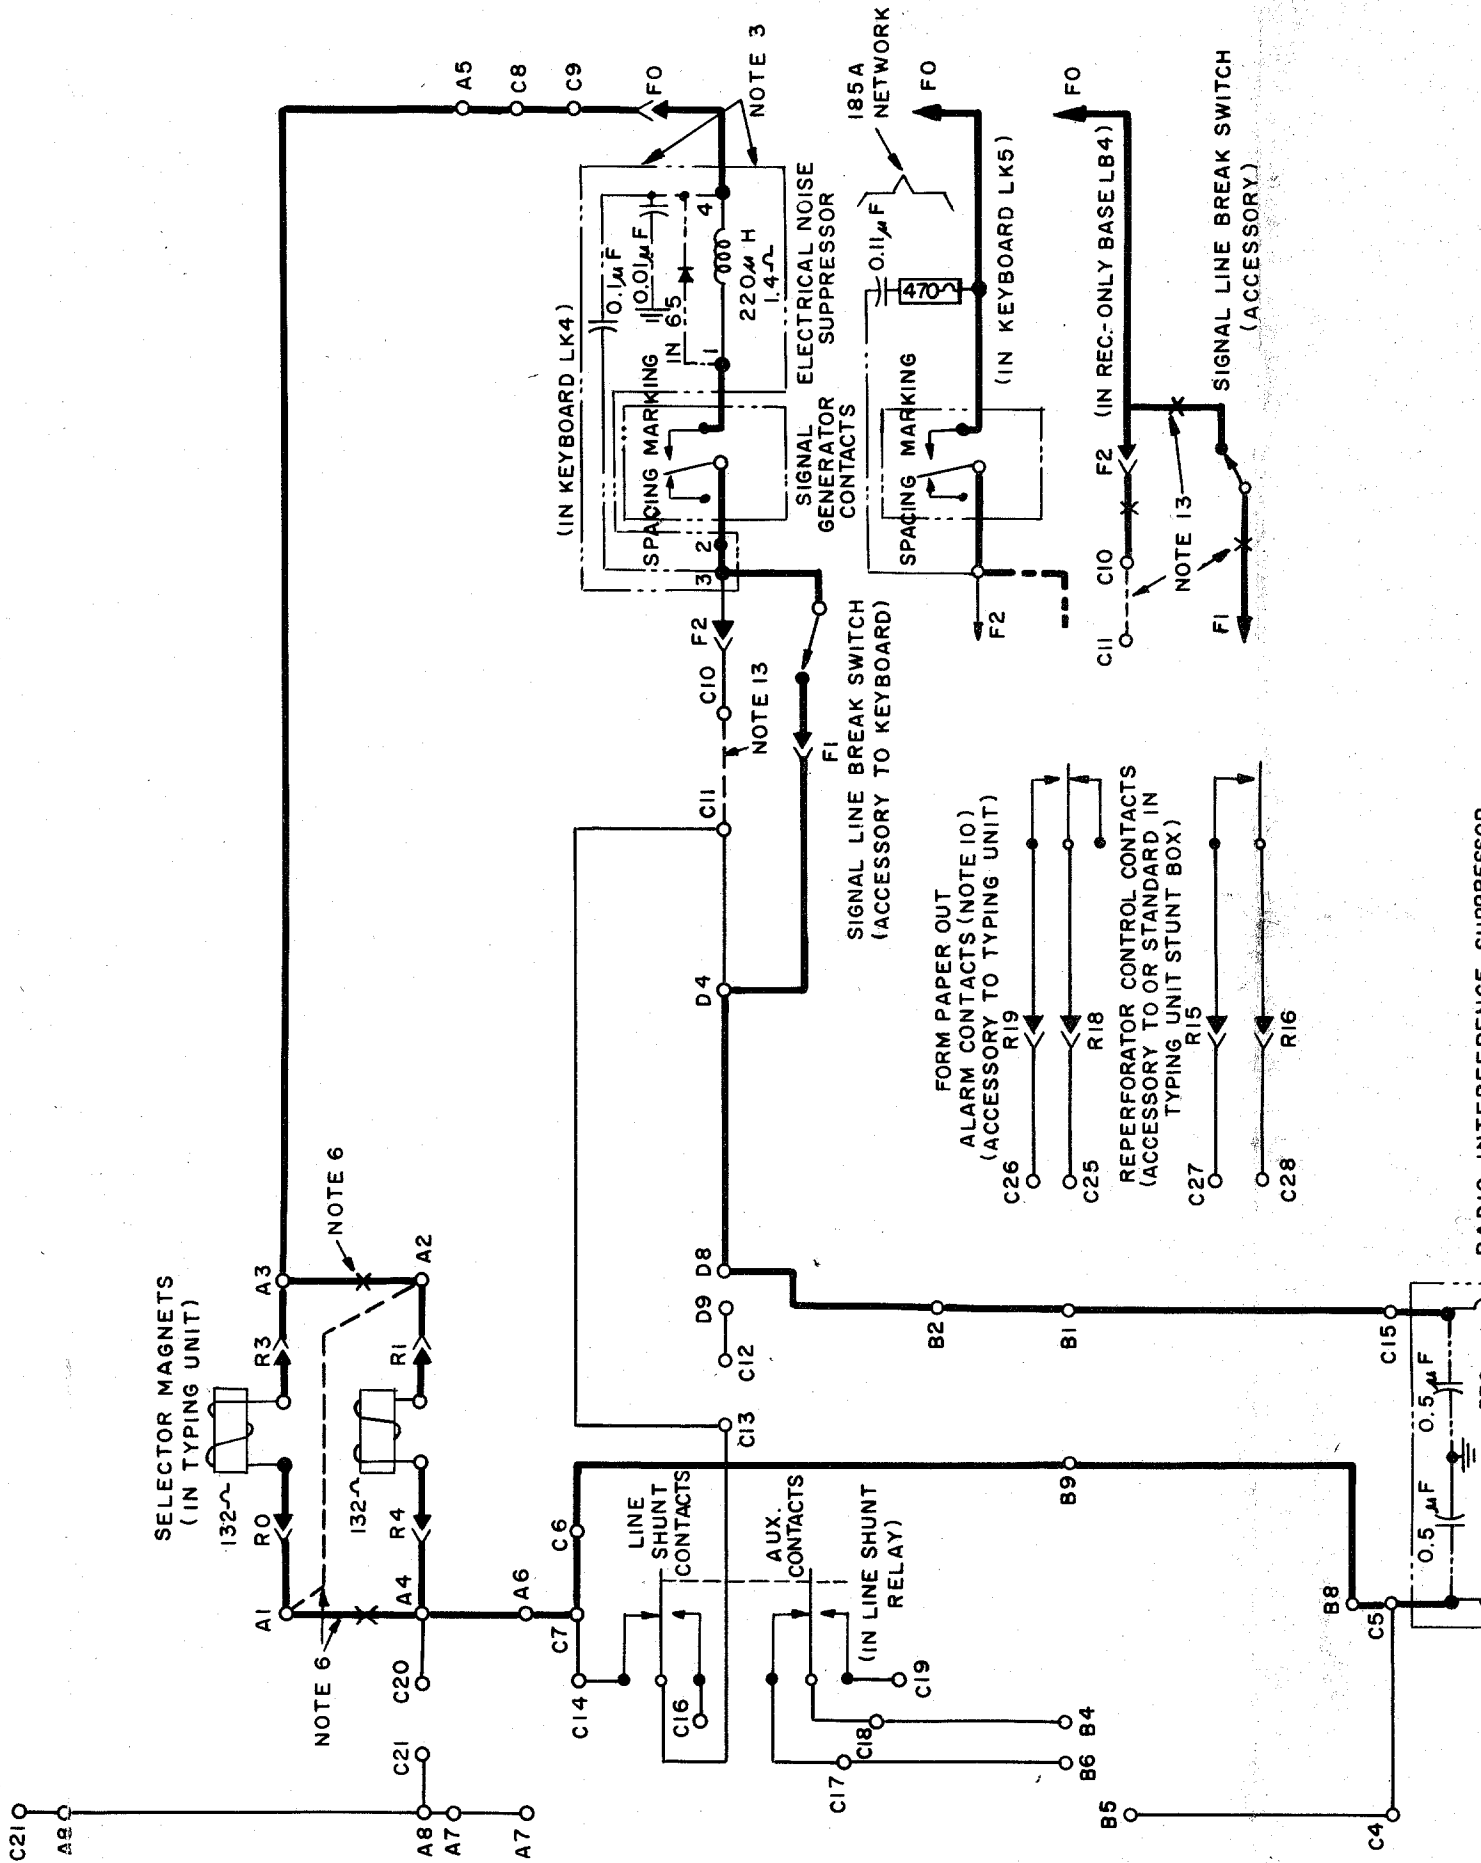

(ACCESSORY TO KEYBOARD)

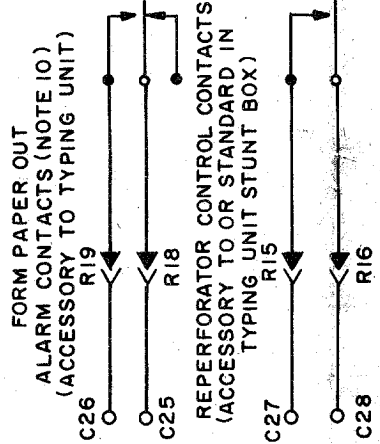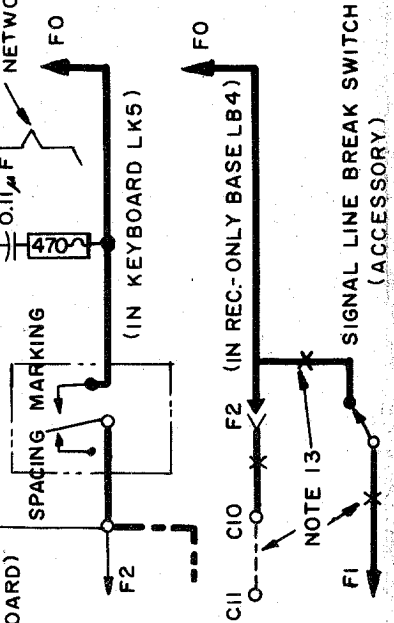

RADIO INTERFERENCE SUPPRESSOR
(ACCESSORY TO CABINET)
(NOTE 7)

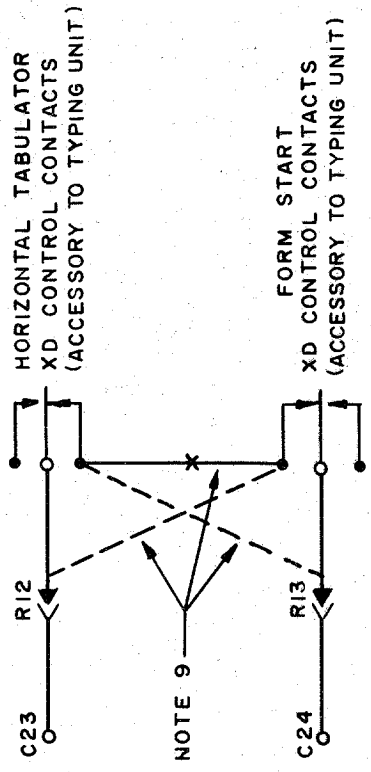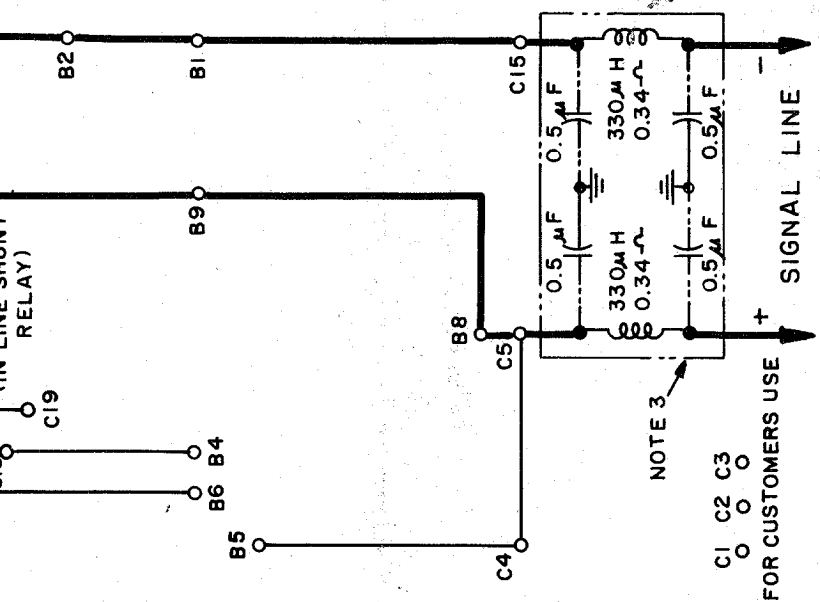

2875WD

REVISIONS

ISSUE	DATE	AUTH. NO.
D	12-30-56	28-7216

SCHEMATIC
WIRING DIAGRAM
MODEL 28
PAGE PRINTER SET
WITH FACILITIES PROVIDED
BY
ELEC. SERVICE UNIT
LESU 7/84
AND ASSOCIATED UNITS

DATE: 2-18-54

RD. FILE NO. 2-30.65.156A

DRAWN: U.S. ENG. CHKD. R.D.
ENGD: G.A.O. APPD: *ORL*

TELETYPE
CORPORATION

2875WD